




ALFRA ROTABEST® - RB 35 B

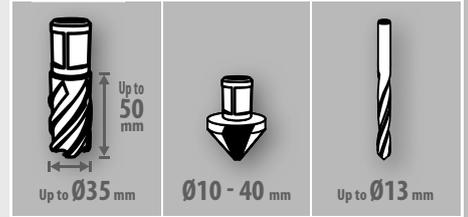

RB 35 B

Core drill dimensions	Ø 12.0 - 35.0 mm
Cutting depth	50.0 mm
Twist drill	Ø 1.0 - 13.0 mm DIN 1897 short
Counterboring	Ø 10.0 - 40.0 mm
Arbors	19 mm Weldon shank
Stroke	120 mm
Gearbox - on-load speed	450 rpm
Power consumption	1,100 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Tool force (10 mm) / magnetic adhesion strength	2,100 N/9,000 N
Magnet foot	70 x 185 mm
Weight	10.6 kg

Gearboxes	
Oil-box gearbox	✓
Slide	
Self-adjusting guide	✓
Operation	
Soft-touch grips	✓
Ergonomic Switch keyboard	✓
Cable length 5 m	✓
Magnet	
Metal rings	✓
Performance and Weight optimisation	✓
Made in Germany	✓

Scope of delivery	
<ul style="list-style-type: none"> • Metal core drill RB 35 B • Carrying case • Seat belt • Coolant device • Operating Instructions • incl. 1 core drill free 	

Prod.-No.

ALFRA Rotabest® RB 35 B	230 Volt	18400
ALFRA Rotabest® RB 35 B	110 Volt	18400.110